


1. New Water Slide: The base bid design includes re-location of the existing water slide and incorporation into the new recreational pool. This bid alternate would replace that slide with a larger new water slide that has an 18+ foot drop and longer flue for enhanced enjoyment by the public. Adding this feature at a later date, while feasible, would be more costly, and would disrupt use of the recreational activity pool for at least three to six months.





Base Bid - Re-located Water Slide

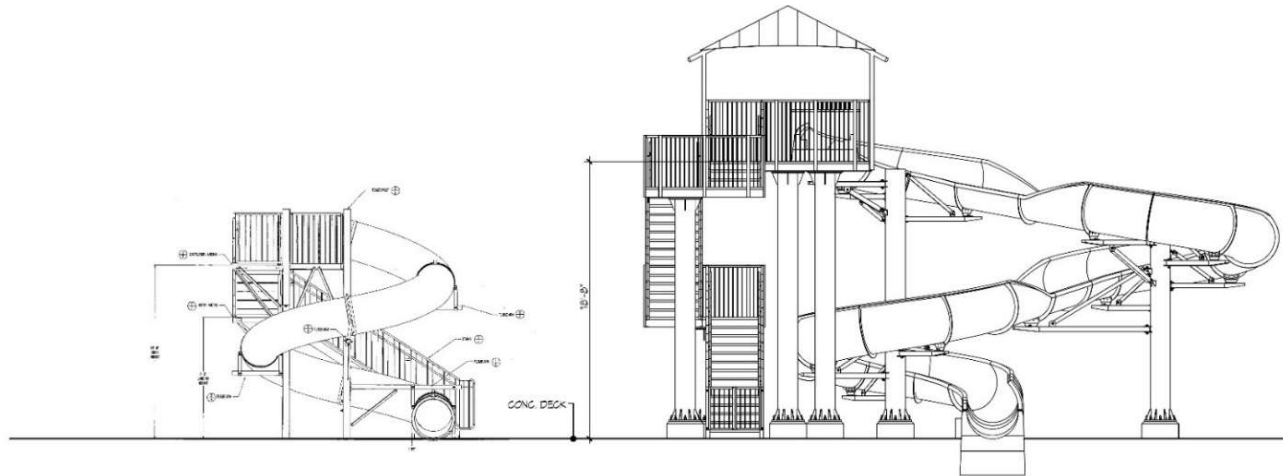


Bid Alternate 1 - New Water Slide

2. Pool Equipment Enclosure Upgrade: The base project scope includes an approximately 31' x 26' pool equipment enclosure for housing pool cover and lane line reels, racing dive platforms and other pool deck equipment. The base design enclosure material is tight knit black vinyl coated chain link. The base design also includes planted vines around the perimeter of the enclosure that will grow to screen the pool equipment. This bid alternate upgrades the enclosure material to a wood composite picket to match the fence enclosure screening next to the chemical storage rooms and would not have any planted vines requiring periodic pruning and upkeep.

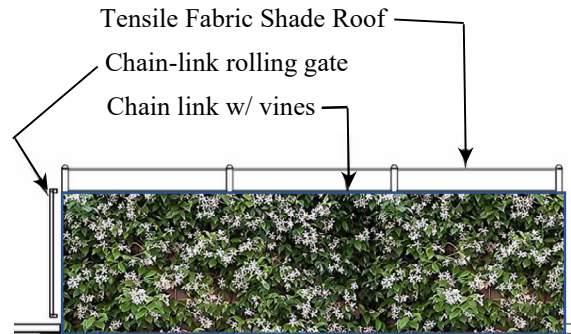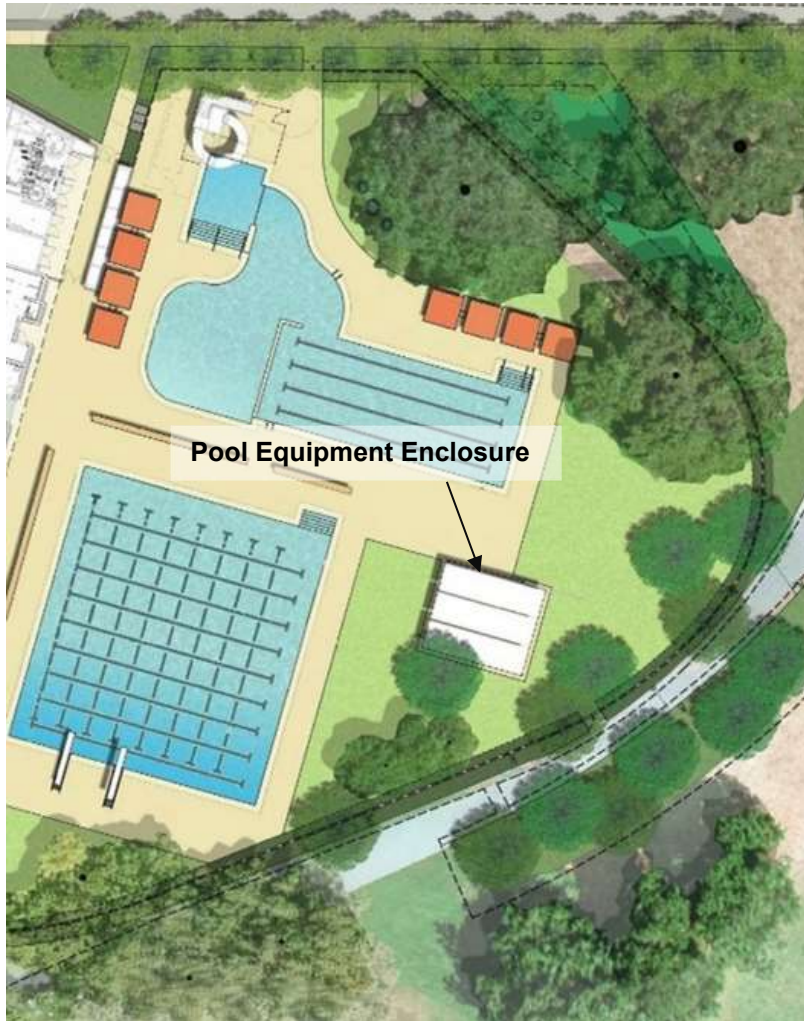

Base Bid: Vinyl Coated Chain link W/ Planted Vine Screening

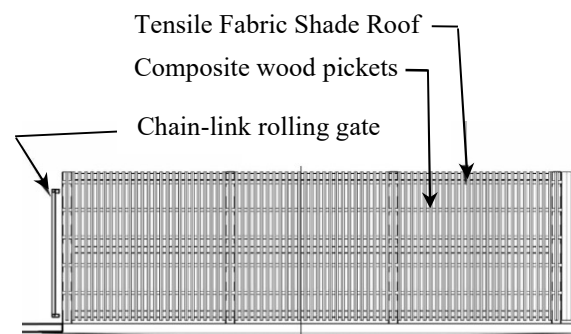

Bid Alternate 2: Composite Wood Picket Siding

Pool Equipment Enclosure Plan: